

Multi Zone

Multiroom Capability

You can use three speaker systems with this AV receiver—a surround-sound speaker system (up to 9.2 channels) in your main listening room, **Zone 2**: a stereo speaker system in a second room, **Zone 3**: a stereo speaker system in a third room. And, you can select a different audio source for each room.

Main Room: In your main listening room, you can enjoy up to 9.2-channel playback (see page 17).

You can enjoy the various listening modes, such as Dolby, DTS, and THX (see pages 76 to 86).

* While Powered Zone 2/3 is being used, playback is reduced to 7.2-channels (see pages 124 and 126).

Zone 2: In your Zone 2 room, you can enjoy 2-channel stereo playback and video playback (see page 124).

* The listening modes cannot be used with Zone 2.

Zone 3: In your Zone 3 room, you can enjoy 2-channel stereo playback (see page 126).

* The listening modes cannot be used with Zone 3.

Main Room


Front high left and right speakers

While Powered Zone 2 is being used, nothing is output by these speakers (page 124).

Front left and right speakers

Front wide left and right speakers

When the speaker is connected with the Powered Zone 2, these speakers cannot be connected (page 124).

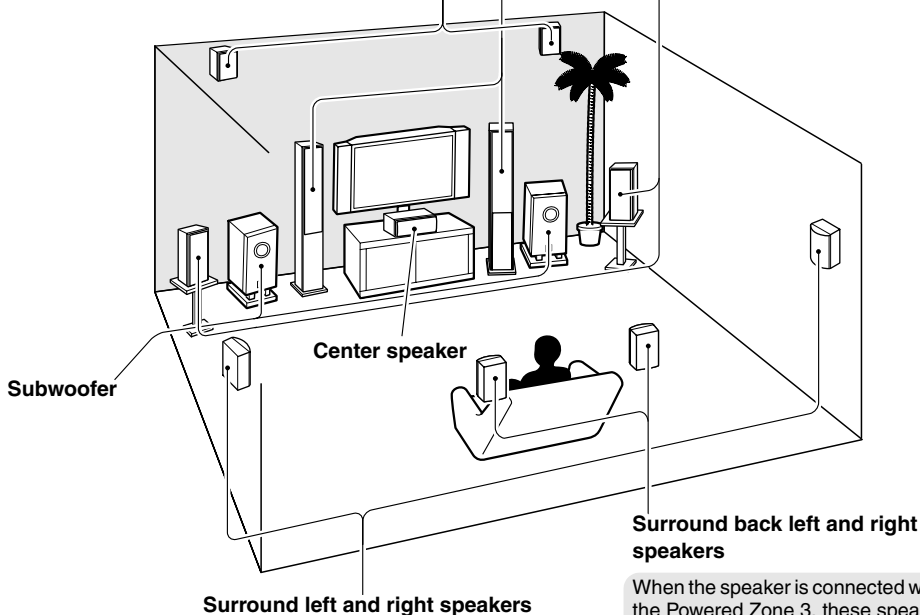


Surround back left and right speakers

When the speaker is connected with the Powered Zone 3, these speakers cannot be connected (page 126).


Surround left and right speakers

Zone 2 Room

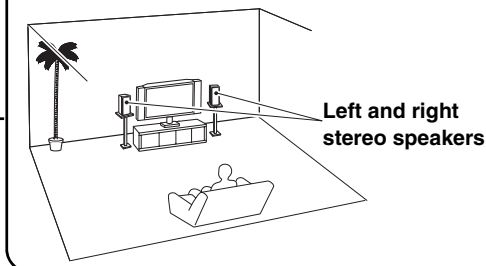

Left and right stereo speakers

Zone 3 Room

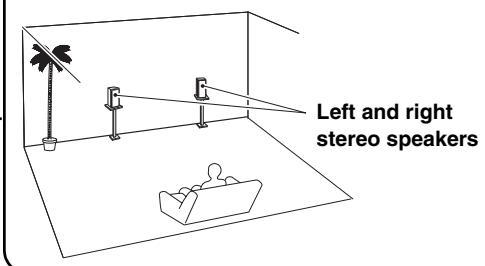

Left and right stereo speakers